PRIFYSGOL ABERYSTWYTH UNIVERSITY

Aberystwyth University

Diffraction of antiplane shear waves and stress concentration in a cracked couple stress elastic material with micro inertia

Nobili, Andrea; Radi, Enrico; Vellender, Adam

Published in:
Journal of the Mechanics and Physics of Solids

DOI:
10.1016/j.jmps.2018.11.013

Publication date:
2019

Citation for published version (APA):
Nobili, A., Radi, E., & Vellender, A. (2019). Diffraction of antiplane shear waves and stress concentration in a cracked couple stress elastic material with micro inertia. *Journal of the Mechanics and Physics of Solids*, *124*, 663-680. https://doi.org/10.1016/j.jmps.2018.11.013

General rights
Copyright and moral rights for the publications made accessible in the Aberystwyth Research Portal (the Institutional Repository) are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

• Users may download and print one copy of any publication from the Aberystwyth Research Portal for the purpose of private study or research.
• You may not further distribute the material or use it for any profit-making activity or commercial gain
• You may freely distribute the URL identifying the publication in the Aberystwyth Research Portal

Take down policy
If you believe that this document breaches copyright please contact us providing details, and we will remove access to the work immediately and investigate your claim.

tel: +44 1970 62 2400
email: is@aber.ac.uk

Download date: 04. May. 2023

Diffraction of antiplane shear waves and stress concentration in a cracked couple stress elastic material with micro inertia

Andrea Nobili[a], Enrico Radi[b], Adam Vellender[c]

[a] *Dipartimento di Ingegneria Enzo Ferrari, via Vivarelli 10, 41125 Modena, Italy*
[b] *Dipartimento di Scienze e Metodi dell'Ingegneria, via Amendola 2, 42122 Reggio Emilia, Italy*
[c] *Institute of Mathematical and Physical Sciences, Aberystwyth University, Ceredigion SY23 3BZ, Wales, UK.*

Abstract

We investigate diffraction of reduced traction shear waves applied at the faces of a stationary crack in an elastic solid with microstructure, under antiplane deformation. The material behavior is described by the indeterminate theory of couple stress elasticity and the crack is rectilinear and semi-infinite. The full-field solution of the crack problem is obtained through integral transforms and the Wiener-Hopf technique. A remarkable wave pattern appears which consists of entrained waves extending away from the crack, reflected Rayleigh waves moving along the crack, localized waves irradiating from the crack-tip with, possibly, super-Rayleigh speed and body waves scattered around the crack-tip. Interestingly, the localized wave solution may be greatly advantageous for defect detection through acoustic emission. Dynamic stress intensity factors are presented, which generalize to Elastodynamics the corresponding results already obtained in the static framework. The correction brings out the important role of wave diffraction on stress concentration.

Keywords: Couple stress, Wave diffraction, Rayleigh waves, Dynamic stress intensity factor

*Corresponding author

1. Introduction

The study of wave diffraction has attracted major interest since its discovery, in the XVII century, by Francesco Maria Grimaldi in the context of light wave propagation (see Mow and Pao (1971) for an excellent historical account). Indeed the term diffraction was then introduced to indicate a deviation from the rectilinear path which could not be accounted for by either reflection or refraction. Starting from the pioneering work by Clebsch (1863) and Rayleigh (1896), diffraction of elastic waves by inclusions, barriers and obstacles has been investigated in a vast body of literature. Nonetheless, only in fairly recent times the importance of dynamic effects in determining the stress concentration in the presence of geometric discontinuities could be appreciated. Indeed, "dynamic stress concentration is a result of diffraction of elastic wave" (Mow and Pao, 1971).

Elastic wave diffraction and stress concentration are almost always investigated within the classical theory of Elastodynamics, which fails to account for the discontinuous nature of many engineering materials, the so-called microstructure. As an example, this theory cannot predict dispersion of Rayleigh waves at high frequency, when the wavelength becomes comparable to the material characteristic length (Georgiadis and Velgaki, 2003). Besides, the discrepancy between the classical theory and the experimental evidence is more pronounced for those complex materials, such as composites, cellular materials, foams, masonry, bone tissues, glassy and semicrystalline polymers, for which modelling is most needed. In this respect, wave diffraction and microstructural effects are deeply related to each other and together contribute to the determination of the stress concentration near geometric discontinuities.

The use of enhanced constitutive models based on strain gradient or nonlocal theories of elasticity allows to circumvent some of the pathological results provided by the classical theory of elasticity (Georgiadis and Vardoulakis, 1998). However, the number of material parameters is comparatively large (Mindlin, 1964; Mindlin and Eshel, 1968; Lam, Yang, Chong, Wang, and Tong, 2003), so

that a substantial effort is required on the experimental side for their determination Maranganti and Sharma (2007). Furthermore, analytical solutions are most often inaccessible (Gao and Ma, 2010).

An intermediate step between the classical elastic theory and the most advanced strain gradient theories is provided by the Cosserat micropolar model, which involves only rotational gradients (Graff and Pao, 1967). A special class of micropolar theories is represented by the indeterminate couple stress (CS) theory, developed by Koiter (1964) for the quasi-static regime and later extended by Eringen (1999) to Elastodynamics. Alongside the traditional Lamé moduli, this elastic constitutive model features two extra material characteristic lengths, associated to bending and torsion, as well as the micropolar rotatory inertia.

Comparably few contributions can be found in the literature discussing wave propagation in solids with microstructure. The original contribution by Graff and Pao (1967) considers wave reflection by a rigid obstacle in a CS half-space under plane strain. More recently, a similar treatment is given in Gourgiotis, Georgiadis, and Neocleous (2013) for a grade two strain-gradient material featuring three material constants. Rayleigh waves propagating in CS materials are investigated in Ottosen, Ristinmaa, and Ljung (2000), in the absence of rotational inertia, and then in Georgiadis and Velgaki (2003) accounting for rotational inertia, again under plane strain. Scattering of antiplane shear waves caused by a cylindrical inclusion within the CS theory is considered by Shodja, Goodarzi, Delfani, and Haftbaradaran (2015).

Enhanced models of continua may result in new types of surface waves, for example the appearance of new surface antiplane waves in a half-space with surface stresses (Eremeyev, Rosi, and Naili, 2016). It is also worth noting that sometimes different constitutive models may lead to the same qualitative wave pattern, as it is shown by Eremeyev, Rosi, and Naili (2018) for antiplane wave propagation within the Gurtin-Murdoch surface elasticity or considering the Toupin-Mindlin strain-gradient elasticity models.

When stress concentration is investigated in microstructured media, it appears that all contributions available in the literature deal with static or steady-

state propagating problems. Zhang, Huang, Chen, and Hwang (1998) give the full-field solution and stress intensity factors for the static Mode III crack problem (antiplane deformation) in a reduced CS material with three material parameters (although only two affect the antiplane behaviour). The general solution for indeterminate CS materials is given in Radi (2008). Later, the problem of steady-state Mode III crack propagation has been investigated by Mishuris, Piccolroaz, and Radi (2012); Morini, Piccolroaz, Mishuris, and Radi (2013); Morini, Piccolroaz, and Mishuris (2014). Georgiadis (2003) appears to be the first and only contribution considering dynamic stress concentration in a straight semi-infinite crack in the presence of microstructure, although the latter is accounted for through the simpler grade two strain gradient theory. Besides, the classical linear elastic fracture mechanics field, with time-harmonic variation, is considered in the far field as the forcing term.

In this paper, a travelling wave loading, applied in the form of shear reduced tractions at the crack faces, is considered as the forcing term. As a result, a complicated wave pattern appears, which differs significantly from the classical solution given in Freund (1998). This loading condition may be used as a building block to address, by means of superposition, any wave propagation problem in a cracked CS half-space. Resonance is triggered when the applied loading is fed *into* the crack-tip at Rayleigh speed. Elastodynamic stress intensity factors are given, which generalize the corresponding results presented in Radi (2008) for the static regime. They incorporate the effect of the applied loading frequency and thereby account for the interplay of the diffracted waves.

2. Antiplane couple stress elasticity

Let us consider a Cartesian co-ordinate system (O, x_1, x_2, x_3), such that the rectilinear crack occupies the semi-infinite line $x_1 < 0$, Fig.1. The indeterminate theory of CS elasticity adopted in the present study provides the following kinematical (compatibility) conditions (Koiter, 1964, Eqs.(4.9)) for the strain tensor

$$\boldsymbol{\varepsilon} = \operatorname{Sym} \operatorname{grad} \boldsymbol{u}, \tag{1}$$

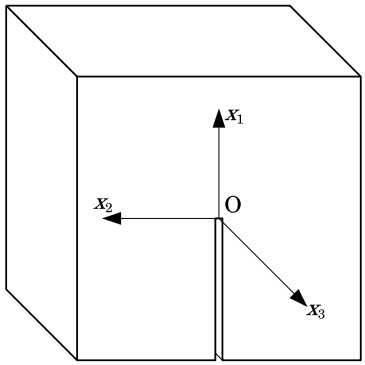

Figure 1: Semi-infinite rectilinear crack $x_1 < 0$ in a half-space under antiplane deformation along x_3

for the rotation vector

$$\boldsymbol{\varphi} = \tfrac{1}{2}\operatorname{curl}\boldsymbol{u}, \tag{2}$$

and for the *torsion-flexure tensor*

$$\boldsymbol{\chi} = \operatorname{grad}\boldsymbol{\varphi}. \tag{3}$$

We observe that, through Eq.(3), micro-rotations are determined by the macro-motion, which feature makes the CS theory a restriction of the micropolar theory. Under antiplane shear deformation, the displacement field $\boldsymbol{u} = (u_1, u_2, u_3)$ is completely defined by the out-of-plane component $u_3 = u_3(x_1, x_2, x_3, t)$. The nonzero components of the strain, rotation and of the flexure-torsion tensors become

$$\varepsilon_{13} = \tfrac{1}{2}u_{3,1}, \qquad \varepsilon_{23} = \tfrac{1}{2}u_{3,2}, \tag{4a}$$

$$\varphi_1 = \tfrac{1}{2}u_{3,2}, \qquad \varphi_2 = -\tfrac{1}{2}u_{3,1}, \tag{4b}$$

$$\chi_{11} = -\chi_{22} = \tfrac{1}{2}u_{3,12}, \qquad \chi_{21} = -\tfrac{1}{2}u_{3,11}, \qquad \chi_{12} = \tfrac{1}{2}u_{3,22}. \tag{4c}$$

Hereinafter, a subscript comma denotes partial differentiation, e.g. $u_{3,i} = \partial u_3/\partial x_i$.

The Cauchy stress tensor $\boldsymbol{t}$ is decomposed into its symmetric and skew-symmetric parts, respectively $\boldsymbol{\sigma}$ and $\boldsymbol{\tau}$,

$$\boldsymbol{t} = \boldsymbol{\sigma} + \boldsymbol{\tau}, \quad \boldsymbol{\sigma} = \operatorname{Sym}\boldsymbol{t}, \quad \boldsymbol{\tau} = \operatorname{Skw}\boldsymbol{t}.$$

In addition, the deviatoric part of the couple stress tensor, $\boldsymbol{\mu}$, is introduced as being work-conjugated to $\boldsymbol{\chi}^T$ (Koiter, 1964, Eq.(2.22)). Indeed, the CS theory is named indeterminate after the observation that the first invariant of the couple-stress tensor, i.e. $\operatorname{tr}\boldsymbol{\mu} = \mu_{11} + \mu_{22} + \mu_{33}$, rests indeterminate and therefore it may be set equal to zero without loss of generality.

At any point of a smooth surface we may specify the *reduced force traction* vector $\boldsymbol{p}$ and the tangential part of the *couple stress traction* vector $\boldsymbol{q}$ (Koiter, 1964, Eqs.(3.5-6))

$$\boldsymbol{p} = \boldsymbol{t}^T\boldsymbol{n} + \tfrac{1}{2}\operatorname{grad}\mu_{nn} \times \boldsymbol{n}, \quad \boldsymbol{q} = \boldsymbol{\mu}^T\boldsymbol{n} - \mu_{nn}\boldsymbol{n}, \tag{5}$$

where we have $\mu_{nn} = \boldsymbol{n}\cdot\boldsymbol{\mu}\boldsymbol{n} = \boldsymbol{q}\cdot\boldsymbol{n}$. In particular, at the bottom/top crack face $x_2 = 0^{\mp}$, it is $\boldsymbol{n} = \pm(0,1,0)$ and, according to Eqs.(5), the out-of-plane component of the reduced force traction and the in-plane components of the couple stress traction read, respectively,

$$p_3 = \pm\left(t_{23} + \tfrac{1}{2}\mu_{22,1}\right), \quad q_1 = \pm\mu_{21}, \quad q_2 = 0. \tag{6}$$

The conditions of dynamic equilibrium of forces and moments read (Koiter, 1964, Eqs.(2.7) and (2.9))

$$\sigma_{13,1} + \sigma_{23,2} + \tau_{13,1} + \tau_{23,2} = \rho\ddot{u}_3, \tag{7a}$$

$$\mu_{11,1} + \mu_{21,2} + 2\tau_{23} = J\ddot{\varphi}_1, \tag{7b}$$

$$\mu_{12,1} + \mu_{22,2} - 2\tau_{13} = J\ddot{\varphi}_2, \tag{7c}$$

where ϱ is the mass density and J is the rotational inertia. Within the framework of linear deformation, the total strain $\boldsymbol{\varepsilon}$ and the curvature $\boldsymbol{\chi}$ are connected to the stress and to the couple stress through the isotropic constitutive relations

$$\boldsymbol{\sigma} = 2G\boldsymbol{\varepsilon} + \Lambda(\operatorname{tr}\boldsymbol{\varepsilon})\mathbf{1}, \quad \boldsymbol{\mu} = 2G\ell^2\left(\boldsymbol{\chi}^T + \eta\boldsymbol{\chi}\right) \tag{8}$$

where Λ and $G > 0$ take up the role of Lamé moduli, $\mathbf{1}$ is the identity tensor, $\ell > 0$ is a characteristic length and $-1 < \eta < 1$ is a dimensionless number similar to Poisson's ratio. We observe that the contribution of Λ is immaterial for antiplane

deformations, cf. (Zhang et al., 1998, Eqs.(8-9)). Besides, the second equation in (8) differs from (Koiter, 1964, Eqs.(4.7)) by a factor 2, which is incorporated in ℓ. The material parameters ℓ and η depend on the microstructure and can be connected to the material characteristic length in bending, ℓ_b, and in torsion, ℓ_t, through

$$\ell_b = \ell/\sqrt{2}, \quad \ell_t = \ell\sqrt{1+\eta}. \tag{9}$$

Values of ℓ_b and ℓ_t may be found in Lakes (1986); Nakamura and Lakes (1995) and, as an example, for polyurethane foam we have

$$\ell = 0.462 \text{ mm}, \quad \eta = 0.797$$

The limiting value $\eta = -1$ corresponds to a vanishing characteristic length in torsion, which is typical of polycrystalline metals. Clearly, the definitions (9) show that $\ell_t = \ell_b$ for $\eta = -\frac{1}{2}$ and $\ell_t = \ell = \sqrt{2}\ell_b$ for $\eta = 0$, the latter situation being the strain gradient effect considered in Zhang et al. (1998). For the limiting value $\eta = 1$, the constitutive equation (8) provides a symmetric couple stress tensor and, consequently, the present theory reduces to the modified couple stress theory of elasticity introduced in Yang, Chong, Lam, and Tong (2002). Indeed, the simplified couple stress theory involves only the material length ℓ for $\ell_b = \ell_t/2 = \ell/\sqrt{2}$.

The constitutive equations (8), together with the kinematic relations (1-4), give stress and couple stress in terms of displacement

$$\sigma_{13} = Gu_{3,1}, \qquad \sigma_{23} = Gu_{3,2}, \tag{10a}$$

$$\mu_{11} = -\mu_{22} = G\ell^2(1+\eta)u_{3,12}, \qquad \mu_{21} = G\ell^2(u_{3,22} - \eta u_{3,11}), \tag{10b}$$

$$\mu_{12} = -G\ell^2(u_{3,11} - \eta u_{3,22}). \tag{10c}$$

We observe that the skew-symmetric part $\boldsymbol{\tau}$ of the total stress tensor $\boldsymbol{t}$ is determined by rotational equilibrium. Indeed, introduction of Eqs.(10) into Eqs.(7b) and (7c) yields

$$\tau_{13} = -\tfrac{1}{2}G\ell^2\Delta u_{3,1} + \frac{J}{4}\ddot{u}_{3,1}, \quad \tau_{23} = -\tfrac{1}{2}G\ell^2\Delta u_{3,2} + \frac{J}{4}\ddot{u}_{3,2}, \tag{11}$$

which correspond to Eqs.(9) of Mishuris et al. (2012). Here, Δ denotes the 2-D Laplace operator.

3. Time-harmonic analysis

It is found expedient to introduce the reference length $\lambda\ell$ and the reference time $T = \ell/c_s$ along with the dimensionless co-ordinates $(\xi_1, \xi_2, \xi_3) = (\lambda\ell)^{-1}(x_1, x_2, x_3)$ and the dimensionless time $\tau = t/T$. Here, $c_s = \sqrt{G/\rho}$ is the shear wave speed of classical elastic media and λ is defined in the following. We consider a shear traction wave applied to the crack faces and zero micropolar stress

$$p_3(\xi_1, 0^{\pm}, \tau) = \pm G\tau_0 \exp\left[\imath(k\xi_1 + \Omega\tau)\right], \quad q_1(\xi_1, 0^{\pm}, \tau) = 0, \quad \xi_1 < 0, \tag{12}$$

where $\imath$ is the imaginary unit and $\Omega = \omega T > 0$ the dimensionless (time) frequency. Here, k denotes the dimensionless (spatial) wavenumber and it is a complex number with non-positive imaginary part, i.e. $\Im(k) \leq 0$, to warrant propagation/decay as $\xi_1 \to -\infty$. In fact, the limiting case $\Im(k) = 0$ corresponds to a propagating wave with phase velocity

$$c = \frac{\Omega}{k}\lambda. \tag{13}$$

When $\Re(k) \lesseqgtr 0$, the applied wave is impinging upon/moving out of the crack-tip. In the special case $\Re(k) = 0$, a harmonic (in time) loading, exponentially decaying along the crack, is considered. We observe that, in the general case, $\tau_0 = \tau_0(k, \Omega)$ and this problem may be used as a building block to solve any harmonic wave propagation problem in a cracked couple stress half-space in antiplane deformation.

Assuming the same time-harmonic variation for the out-of-plane displacement as in the applied wave (12)

$$u_3(\xi_1, \xi_2, \tau) = \ell w(\xi_1, \xi_2) \exp \imath\Omega\tau,$$

and substituting Eqs.(10a-11) into (7-7c), we get the metaharmonic PDE Georgiadis and Velgaki (2003) for the function w:

$$\Delta\Delta w - 2\left(1 - h_0^2\Omega^2\right)\lambda^2\Delta w - 2\Omega^2\lambda^4 w = 0, \tag{14}$$

where $\Delta w = w_{,11} + w_{,22}$ and we have let the dimensionless parameter Mishuris et al. (2012)

$$h_0 = \frac{h}{\ell}, \quad \text{with} \quad h = \tfrac{1}{2}\sqrt{\frac{J}{\rho}}.$$

We observe that h is proportional to the dynamic characteristic length introduced in Shodja et al. (2015). This generalized bi-harmonic equation can be easily factored

$$\left(\Delta + \delta^2\right)(\Delta - 1)\, w = 0, \tag{15}$$

where we have let the positive dimensionless parameter

$$\delta = \frac{1}{\sqrt{2}\Omega}\left[\sqrt{(1 - h_0^2\Omega^2)^2 + 2\Omega^2} - 1 + h_0^2\Omega^2\right], \tag{16}$$

and, for convenience, we have chosen the scaling factor λ as to have 1 in the second factor of Eq.(15)

$$\lambda = \sqrt{\frac{\delta}{\sqrt{2}\Omega}}.$$

We observe that λ is a strictly monotonic increasing (decreasing) function of Ω inasmuch as $h_0 \gtrless h_{0cr} = 1/\sqrt{2}$, while $h_0 = h_{0cr}$ lends $\lambda \equiv h_{0cr}$. Besides, in the static limit $\Omega = 0$, we get $\delta = 0$, $\lambda = h_{0cr}$ and the factorization boils down to

$$\Delta\,(\Delta - 1)\, w = 0,$$

that recovers the governing equation for the static regime considered in (Radi, 2008, Eq.(10)) and in (Zhang et al., 1998, Eq.(11)). It is worth emphasizing that the limiting case $\eta = -1$ lends the Mode III crack problem of classical linear elasticity in the static regime only.

Using Eqs.(1,8,10b, 11) into the first of Eqs.(6), the corresponding loading conditions (12) becomes

$$(1 - \delta^2)w_{,2} - \left[(2 + \eta)w_{,11} + w_{,22}\right]_{,2} = 2\lambda^3\tau_0 \exp \imath k\xi_1, \quad \xi_1 < 0, \xi_2 = 0^+. \tag{17}$$

Besides, the skew-symmetric character of Mode III requires

$$w(\xi_1, 0) = 0, \quad \xi_1 > 0, \tag{18a}$$

$$q_1(\xi_1, 0) = 0, \quad \xi_1 > 0. \tag{18b}$$

Therefore, the condition of zero micropolar traction $q_1(\xi_1, 0) = 0$ stands along the whole crack line and, in light of Eqs.(6,10b), it gives

$$w_{,22} - \eta w_{,11} = 0, \quad \xi_2 = 0. \tag{19}$$

We note that the material parameter η only appears in the boundary conditions (17) and (19).

3.1. Edge-waves for antiplane deformation

Planar shear waves travelling in the bulk of the material have been considered in (Mishuris et al., 2012, §2.1). Here, similarly to Ottosen et al. (2000); Georgiadis and Velgaki (2003), we look at edge-wave solutions

$$u_3(\xi_1, \xi_2, \tau) = \ell W(\xi_2) \exp\left[\imath \left(m\xi_1 + \Omega\tau\right)\right],$$

where $W(\xi_2)$ decays fast enough away from the crack line and we assume m to be real. Then, Eq.(15) governing harmonic motion for antiplane deformation gives

$$W'''' + \left(\delta^2 - 2m^2 - 1\right) W'' + \left(m^2 + 1\right)\left(m^2 - \delta^2\right) W = 0,$$

which admits the solution

$$W(\xi_2) = C_1 \exp\left[-\alpha(m)\xi_2\right] + C_2 \exp\left[-\beta(m)\xi_2\right], \tag{20}$$

where

$$\alpha(s) = \sqrt{s^2 - \delta^2}, \quad \beta(s) = \sqrt{s^2 + 1}. \tag{21}$$

The constants C_1 and C_2 are determined imposing homogeneous boundary conditions on the crack surface, which amounts to the vanishing of reduced force and couple stress traction at $\xi_2 = 0$,

$$\begin{cases} W'(0) + \frac{1}{1-\delta^2}\left[(2+\eta)m^2 W'(0) - W'''(0)\right] = 0, \\ W''(0) + \eta m^2 W(0) = 0. \end{cases} \tag{22}$$

Plugging Eq.(20) into the boundary conditions (22) yields the following linear system for the constants C_1 and C_2

$$\begin{cases} \alpha(m)\left[(\eta+1)m^2 + 1\right] C_1 + \beta(m)\left[(\eta+1)m^2 - \delta^2\right] C_2 = 0 \\ \left[(\eta+1)m^2 - \delta^2\right] C_1 + \left[(\eta+1)m^2 + 1\right] C_2 = 0 \end{cases},$$

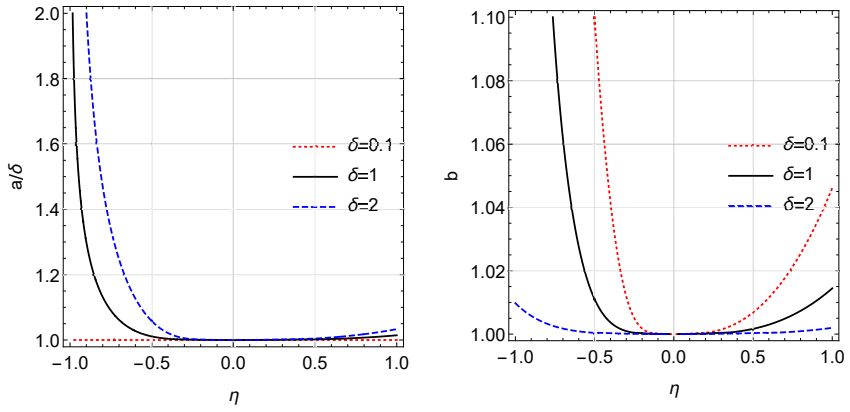

(a) (b)

Figure 2: Location of the real root a (a) of the purely imaginary root ib (b) as a function of η for $\delta = 0.1$ (red, dotted), $\delta = 1$ (black, solid) and $\delta = 2$ (blue, dashed)

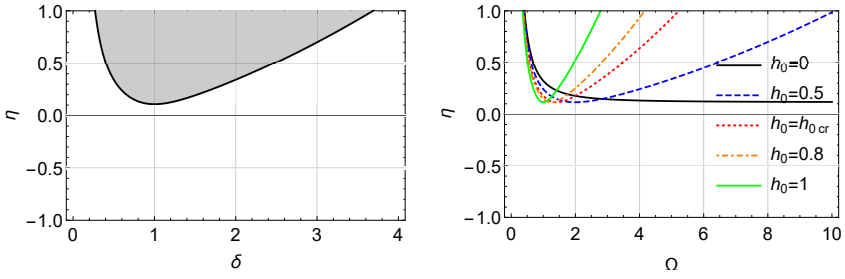

(a) (b)

Figure 3: Domain (δ, η) for the complex root s_3 to sit in the physical Riemann sheet: (a) outside the shaded area s_3 slips through the branch cut out of the physical sheet; (b) role of h_0 on the domain (Ω, η)

which admits non-trivial solutions if and only if the following secular equation is satisfied

$$R(m) = 0, \tag{23}$$

where

$$R(s) = \alpha(s)\left[(\eta+1)s^2+1\right]^2 - \beta(s)\left[(\eta+1)s^2-\delta^2\right]^2. \tag{24}$$

The function $R(s)$ is the Rayleigh wave function for antiplane deformation in couple stress elastic materials. It can be compared with (Freund, 1998, Eq.(2.5.12)), valid for classical elastic materials. For the selected branch cuts,

the function $R(s)$ is single valued and analytic in the cut s-plane. In contrast to classical elasticity (Freund, 1998, §2.5.2), for the considered range of variation of the parameters δ and η, Eq.(23) admits *three* complex conjugated pairs of order-1 roots, namely two real roots $s = \pm a$, two purely imaginary roots $s = \pm \imath b$ and the pair of complex roots $s = \pm s_3$, which may fall out of the physical Riemann sheet. The location of the roots a and $\imath b$ against the parameters η and δ is presented in Fig.2. There, it can be observed that $a \geq \delta$, $b \geq 1$ and yet they sit very close to the branch points, especially for $\eta > -1/2$. In particular, equality holds for $\eta = 0$, for which value roots become of order $1/2$. In the static case it is $\delta = 0$ and we have $a = 0$ of order 1.

The pair of imaginary roots $\pm \imath b$ is here connected to the strain-gradient effect. In general, it is associated to a fourth-order governing equation and it accounts for the edge-effect in shell theories Kaplunov and Nobili (2017) or for evanescent modes in supported plates Nobili, Radi, and Lanzoni (2017). The additional pair of complex roots, $\pm s_3$, exists in the physical Riemann sheet in the domain (δ, η) plotted in Fig.3.

The real root $a > 0$ of the dispersion relation (23) provides the Rayleigh wave speed c_R according to Eq.(13)

$$\frac{c_R}{c_s} = \frac{1}{a}\sqrt{\frac{\Omega\delta}{\sqrt{2}}} = \frac{\sqrt{\sqrt{(1-h_0^2\Omega^2)^2 + 2\Omega^2} - 1 + h_0^2\Omega^2}}{\sqrt{2}a}. \tag{25}$$

In the static limit, $\Omega \to 0^+$, we have $a \sim \delta \to \Omega/\sqrt{2}$, whence $c_R \to c_s$ and edge-waves collapse into classical shear waves. In the special case $\eta = 0$, the roots a and $\imath b$ are located on the branch points δ and $\imath$, respectively, while s_3 falls out the physical sheet. In this case, replacing a with δ in Eq.(25) and using Eq.(16) gives the speed $\tilde{c}$ of bulk shear waves (cf. (Mishuris et al., 2012, Eq.(14)))

$$\frac{\tilde{c}}{c_s} = \frac{\sqrt{\sqrt{(1-h_0^2\Omega^2)^2 + 2\Omega^2} + 1 - h_0^2\Omega^2}}{\sqrt{2}}.$$

In fact, we have $\alpha(\delta) = 0 = \beta(\imath)$ and the solution (20) is no longer decaying away from the crack line. In the special case $h_0 = h_{0cr}$ and $\eta = 0$, edge-waves collapse into non-dispersive shear waves, i.e. $c_R = \tilde{c} \equiv c_s$.

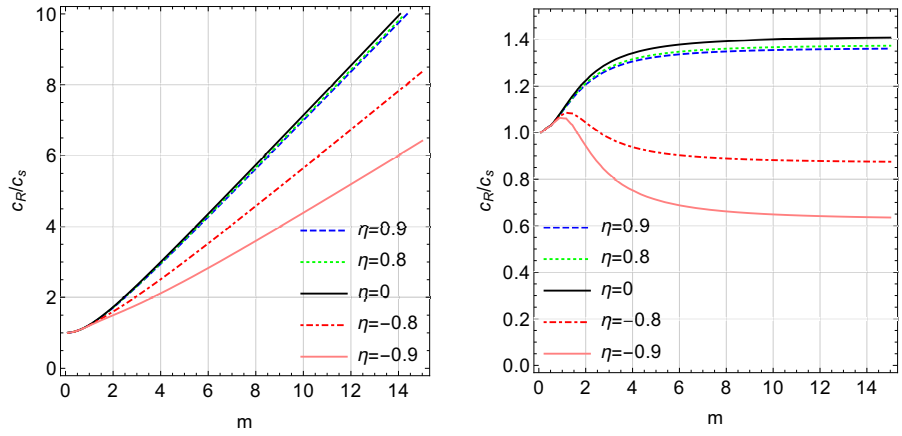

(a) $h_0 = 0$ (b) $h_0 = 0.5$

(c) $h_0 = h_{0cr}$ (d) $h_0 = 1$

Figure 4: Dispersion curves for the dimensionless Rayleigh wave speed c_R/c_s (the curve $\eta = 0$ corresponds to the bulk wave speed $\tilde{c}/c_s$)

Dispersion curves for the relative edge-wave speed c_R/c_s for different values of the microstructural parameters h_0 and η are plotted in Fig.4. As it is usually the case, edge-waves occur at speed slightly below that of bulk waves Destrade, Fu, and Nobili (2016). As anticipated, in the static limit, the antiplane edge-wave speed c_R recovers the shear wave speed of classical elastic media c_s. We observe that, in the absence of rotational inertia (i.e. $h_0 = 0$), the edge-wave speed c_R grows monotonically with the wavenumber (Fig.4a) and waves are thereby dispersive, as already found in Graff and Pao (1967); Ottosen et al. (2000) for plane-strain Rayleigh waves. Besides, $c_R > c_s$, which is physically unrealistic (Shodja et al., 2015). In contrast, for $h_0 > 0$, the edge-wave speed quickly asymptotes a finite limit and the dispersive character of propagation is really restricted to low wavenumbers. Propagation turns perfectly non-dispersive, as in classical elastic materials, with speed $c_R \equiv c_s$, for $h_0 = h_{0cr}$ and $\eta = 0$, see Fig.4c. For $h_0 > h_{0cr}$ and $\eta \neq 0$ or for $h_0 > 0$ and η close enough to -1, the edge-wave speed becomes a decreasing function of wavenumber. This behaviour is discussed in Georgiadis and Velgaki (2003), in the context of plane-strain Rayleigh wave propagation, with reference to experimental results and lattice theories.

Fig.5 superposes dispersion curves for the group velocity c_g

$$\frac{c_g}{c_s} = \frac{\lambda^2}{\frac{\mathrm{d}m}{\mathrm{d}\Omega}\lambda - m\frac{\mathrm{d}\lambda}{\mathrm{d}\Omega}},$$

over the corresponding dispersion curve for the Rayleigh wave phase velocity c_R. Dispersion is termed *anomalous* when $c_g > c_R$ and *normal* otherwise (Achenbach, 2012, §6.5). Anomalous dispersion is met for $h_0 = 0$ at any η and for $0 < h_0 < h_{0cr}$ and η close to 1. This condition is related to energy propagating faster than the wavelets which build up at the front of the group and slowly move to the back until they disappear, see (Gourgiotis et al., 2013, §2) in the context of gradient elasticity.

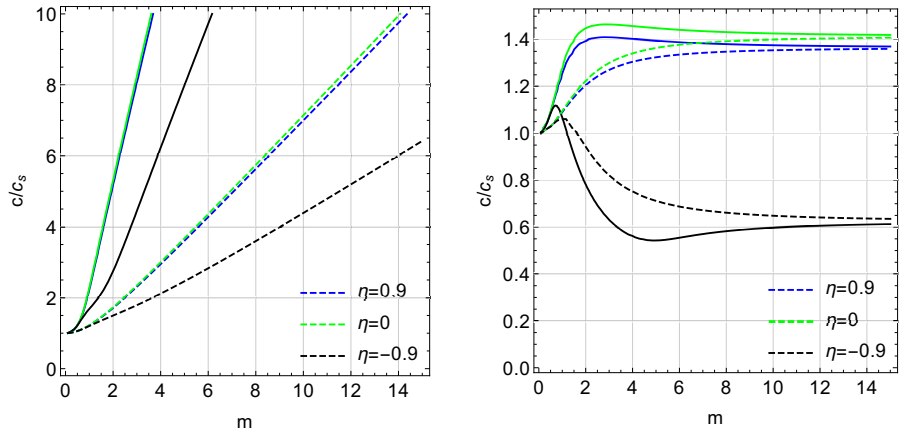

(a) $h_0 = 0$ (b) $h_0 = 0.5$

(c) $h_0 = h_{0cr}$ (d) $h_0 = 1$

Figure 5: Relative group velocity c_g/c_s (solid) and Rayleigh wave speed c_R/c_s (dashed) as a function of wavenumber (the curve $\eta = 0$ corresponds to the bulk wave speed $\tilde{c}/c_s$)

4. Analysis in the frequency domain

We adopt Fourier transforms to recast the problem in the frequency domain. Owing to the skew-symmetry of the problem, only either half-plane, say $\xi_2 > 0$, needs to be considered. The full-range Fourier transform along ξ_1 is defined as Noble (1958); Roos (1969)

$$\bar{w}(s, \xi_2) = \int_{-\infty}^{\infty} w(\xi_1, \xi_2) \exp(\imath \xi_1 s) \mathrm{d}\xi_1,$$

while Fourier inversion formula gives

$$w(\xi_1, \xi_2) = (2\pi)^{-1} \int_{\mathscr{L}} \bar{w}(s, \xi_2) \exp(-\imath \xi_1 s) \mathrm{d}s.$$

In the inverse transform, the integration path $\mathscr{L}$ is obtained by deformation of the real interval, as described in the following. The complex plane $\mathbb{C}$ is split into two domains, $\mathbb{C} = \mathcal{D}^+ \cup \mathcal{D}^-$, respectively lying on and above and on and below the integration path $\mathscr{L}$.

Let us define the half-range Fourier transforms

$$\bar{w}^-(s) = \int_{-\infty}^{0} w(\xi_1, 0) \exp(\imath \xi_1 s) \mathrm{d}\xi_1, \quad \bar{p}_3^+(s) = \int_{0}^{\infty} p_3(\xi_1, 0) \exp(\imath \xi_1 s) \mathrm{d}\xi_1.$$

Taking the full-range Fourier transform of Eq.(15) gives

$$\bar{w}_{,2222} - (2s^2 + 1 - \delta^2)\bar{w}_{,22} + (s^2 + 1)(s^2 - \delta^2)\bar{w} = 0,$$

which admits the solution (20)

$$\bar{w}(s, \xi_2) = C_1 \exp[-\alpha(s)\xi_2] + C_2 \exp[-\beta(s)\xi_2], \tag{26}$$

where C_1 and C_2 are complex-valued functions of s.

Here $\alpha(s)$ and $\beta(s)$ are defined as in (21) but now s is generally complex and we need to specify the branch in the square root so that (26) is bounded as $\xi_2 \to +\infty$. The branch cuts for $\alpha(s)$, denoted by $\mathcal{K}^{\mp}$, are straight and connect, respectively, the branch points $s = \pm\delta$ to ∞ in the direction $\mp(\delta + \imath)$ and thereby they pass through $s = \mp\imath$, as shown in Fig.6. They may be parametrized as

$$\mathcal{K}^{\mp} = \{s(t) = \pm\delta \mp (\delta + \imath)t, \quad t > 0\}. \tag{27}$$

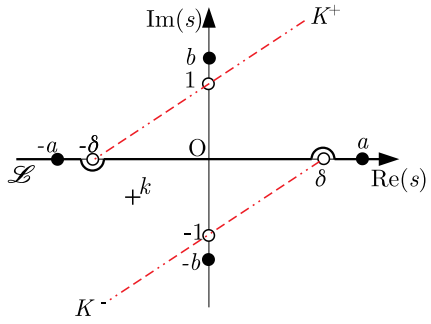

Figure 6: Branch cuts $\mathcal{K}^{\pm}$ (red dash-double dot lines), zeros (black dots), branch points (circles), applied traction wavenumber (cross) and integration path $\mathscr{L}$ (solid curve) in the complex plane $\mathbb{C} = \mathcal{D}^+ \cup \mathcal{D}^-$. The domains $\mathcal{D}^{\pm}$ stand on and above (under) the integration path $\mathscr{L}$, respectively

In likewise fashion, the branch cuts for $\beta(s)$ rest inside $\mathcal{K}^{\mp}$ and connect the branch points $s = \pm\imath$ to $\mp(\delta + \imath)\infty$, i.e. they have the parametrization (27) with $t > 1$. Square root is made definite by letting $\alpha(s)$ and $\beta(s)$ tend to $|s|$ as $s \to \infty$ along the real axis (see (Noble, 1958, p.10)). With such definitions, the square roots in $\alpha(s)$ and $\beta(s)$ are defined so as to have positive or zero real part (respectively decaying and propagating solutions) when s is real. Indeed, for $s = s_1 \in \mathbb{R}$, it is

$$\alpha(s_1) = \begin{cases} \imath\sqrt{\delta^2 - s_1^2}, & |s_1| < \delta \\ \sqrt{s_1^2 - \delta^2}, & s_1 \geq \delta \end{cases}, \quad \beta(s_1) = \sqrt{s_1^2 + 1}. \tag{28}$$

The full-range transform of the reduced traction vector at the l.h.s of Eq.(17) is

$$\bar{p}_3(s, \xi_2) = \frac{G}{2\lambda^3}\left[\left((2+\eta)s^2 + 1 - \delta^2\right)\bar{w}_{,2} - \bar{w}_{,222}\right]. \tag{29}$$

The minus half-range Fourier transform of the first boundary condition (12) reads

$$\bar{p}_3^-(s, 0) = -\imath\frac{G\tau_0}{s+k}, \tag{30}$$

and the plus transform of Eq.(18a) lends

$$\bar{w}^+(s, 0) = 0, \tag{31}$$

while the full-range transform of Eq.(19) gives

$$\bar{w}_{,22}(s,0) + \eta s^2 \bar{w}(s,0) = 0. \tag{32}$$

Plugging the solution (26) into Eq.(32) gives a connection between C_1 and C_2

$$C_1 = -\frac{(\eta+1)s^2+1}{(\eta+1)s^2-\delta^2} C_2. \tag{33}$$

Thus, making use of the general solution (26) and of the connection (33), we find for the full-range Fourier transform of the traction vector (29)

$$\frac{G(1+\delta^2)}{2\lambda^3\left[(\eta+1)s^2-\delta^2\right]} K(s) C_2 = \bar{p}_3^+(s,0) - \imath \frac{G\tau_0}{s+k}, \tag{34}$$

where

$$K(s) = (1+\delta^2)^{-1} R(s), \tag{35}$$

and $R(s)$ is the Rayleigh function introduced in Eq.(24). The kernel function $K(s)$ is even and it obeys the reflection principle

$$K(s^*) = K(s)^*, \tag{36}$$

where a superscript asterisk denotes complex conjugation, i.e. $s^* = \Re(s) - \imath\Im(s)$. As a consequence, $K(s)$ is real-valued on the real axis.

In light of Eqs.(26,31) and (33), we get for the displacement $\bar{w}(s,0)$

$$-\frac{1+\delta^2}{(\eta+1)s^2-\delta^2} C_2 = \bar{w}^-(s,0). \tag{37}$$

Solving Eq.(37) for C_2 and substituting into Eq.(34) yields the inhomogeneous Wiener-Hopf functional equation

$$G^{-1}\bar{p}_3^+(s,0) = -\frac{1}{2\lambda^3} K(s) \bar{w}^-(s,0) + \imath \frac{\tau_0}{s+k}. \tag{38}$$

4.1. Asymptotic behaviour

The asymptotic behaviour of the out of plane reduced traction and displacement at the crack tip is expected to be the same as what is obtained in the

stationary crack problem under quasi-static loading, respectively (Radi, 2008, Eq.(39) and (40))

$$p_3(\xi_1,0) = O\left(\xi_1^{-3/2}\right), \qquad \text{as } \xi_1 \to 0^+,$$
$$w(\xi_1,0) = O\left((-\xi_1)^{3/2}\right), \qquad \text{as } \xi_1 \to 0^-.$$

Consequently, the Tauberian theorem for the Fourier transform gives Roos (1969)

$$\bar{p}_3^+(s,0) = O\left(s^{1/2}\right), \quad \text{and} \quad \bar{w}^-(s,0) = O\left(s^{-5/2}\right), \quad \text{as } |s| \to \infty. \tag{39}$$

4.2. Radiation condition

As discussed in (Noble, 1958, §1.5), application of the W-H technique requires a strip of regularity, which is warranted when a small imaginary part for δ is assumed such that $\delta^2 = \delta_1^2 - \imath\epsilon\delta_1$. Nonetheless, the limiting situation $\epsilon = 0$ is still accessible provided that Sommerfeld's radiation condition is enforced. This demands that elastic waves transfer energy *from* the loading zone *to* infinity and not vice versa. In particular, along the crack surface, energy is carried away by Rayleigh waves, travelling in the negative ξ_1-direction with the speed c_R defined in Eq.(25). Accordingly, proceeding as in Sec.3.1, we have

$$w(\xi_1,0) = A\exp(\imath a\xi_1) + O(\xi_1^{-\rho}), \quad \text{as } \xi_1 \to -\infty,$$

where A is a constant and $\rho > 0$ warrants decay. The corresponding minus Fourier transform can be split as

$$\bar{w}^-(s,0) = \int_{-\infty}^{-M} + \int_{-M}^{0} w(\xi_1,0)\exp(\imath s\xi_1)\mathrm{d}\xi_1,$$

for any large positive constant M. We observe that the second integral is an entire function, for it has no singular points in the complex plane. Consequently, all singular points of the function $\bar{w}^-(s,0)$ come with the first integral

$$\int_{-\infty}^{M} \exp\left[-\imath(s+a)\xi_1\right]\mathrm{d}\xi_1 = \frac{\imath}{s+a}\exp\left[\imath M(s+a)\right],$$

which indeed brings the singular point $s = -a$. Therefore, it follows that

$$\bar{w}^-(s,0) = (s+a)^{-1}, \quad \text{as } s \to -a. \tag{40}$$

Along every other direction, different from the negative ξ_1-axis, Sommerfeld's radiation condition for the governing equation (14) requires, in polar coordinates (r, ϑ), $r = (\xi_1^2 + \xi_2^2)^{1/2}$, (Noble, 1958, §1.5)

$$\frac{\partial w}{\partial r} + \imath\delta w = o\left(\frac{1}{\sqrt{r}}\right), \quad \text{as } r \to \infty \quad (\vartheta \neq \pm\pi), \tag{41}$$

uniformly in ϑ. Such behaviour should be recovered by the present solution, although the field equation (12) is not of the classical Helmholtz type Georgiadis and Vardoulakis (1998). Condition (41) is compatible with the following asymptotic behaviour for the displacement along radial lines

$$w(r, \vartheta) = O\left(r^{-1/2}\exp(-\imath r\delta)\right), \quad \text{as } r \to \infty \quad (\vartheta \neq \pm\pi),$$

and in particular, for $\vartheta = \pi/2$, the ξ_2-axis is considered

$$w(0, \xi_2) = O\left(\xi_2^{-1/2}\exp(-\imath\xi_2\delta)\right), \quad \text{as } \xi_2 \to \infty. \tag{42}$$

Taking the inverse transform of (26) and using Eqs.(33,37) we have

$$w(0,\xi_2) = \frac{1}{2\pi(\delta^2+1)}\int_{\mathscr{L}} \Big\{ \left(\delta^2 - (\eta+1)s^2\right)\exp\left[-\xi_2\beta(s)\right] + \left((\eta+1)s^2+1\right)\exp\left[-\xi_2\alpha(s)\right]\Big\}\bar{w}^-(s,0)\mathrm{d}s, \tag{43}$$

and, in consideration of (28), the limit as $\xi_2 \to \infty$ is given by

$$w(0,\xi_2) \to \frac{1}{2\pi(\delta^2+1)}\int_{-\delta}^{\delta}\left((\eta+1)s^2+1\right)\exp\left[-\xi_2\alpha(s)\right]\bar{w}^-(s,0)\mathrm{d}s.$$

Then, by the method of stationary phase Bleistein and Handelsman (1975), it can be shown that $w(0, \xi_2)$ behaves as in Eq.(42). We observe that, setting $\xi_2 = 0$ in Eq.(43), one gets

$$w(0,0) = \frac{1}{2\pi(\delta^2+1)}\int_{\mathscr{L}}\bar{w}^-(s,0)\mathrm{d}s = 0,$$

the last equality being obtained by Jordan's lemma.

5. Full-field solution by the Wiener-Hopf method

In the present section the Wiener-Hopf analytic continuation technique Noble (1958); Roos (1969); Freund (1998) is used to obtain the full-field solution

for a semi-infinite crack in a half-space subject to a reduced traction shear wave applied to the crack surfaces. For the application of the Wiener-Hopf (W-H) method, knowledge of the number and of the location of all roots of the kernel function $K(s)$, as defined in Eq.(35), is demanded Noble (1958). Besides, the behaviour of $K(s)$ as $|s| \to \infty$ is required

$$K(s) = c|s|^3 + O(|s|), \quad \text{as } |s| \to \infty,$$

where $c = \frac{1}{2}(\eta+1)(3-\eta)$. With this knowledge, the function $K(s)$ can be factorized into the product of two functions, $K^{\pm}(s)$, analytic in the corresponding domain $\mathcal{D}^{\pm}$ (Fig.6). Indeed, let us introduce the function

$$F(s) = \frac{\alpha(s)K(s)}{c(s^2-a^2)(s^2+b^2)} \frac{s^2-s_0^2}{s^2-s_3^2}, \tag{44}$$

where s_0 is a special point defined in Eq.(A.4). The choice of $\beta(s)$ in place of $\alpha(s)$ at the numerator of $F(s)$ is equally possible but it prevents considering the special cases $\eta = 0$ and $\delta = 0$ within the general framework. Indeed, for $\eta = 0$, the roots $\pm a$ and $\pm \imath b$ coincide with the branch points $\pm\delta$ and $\pm\imath$, respectively, and they become of order 1/2. Similarly, for $\delta = 0$, the pair of simple roots $\pm a$ collapse into the *simple* root $a = 0$.

The function $F(s)$ is even, satisfies the reflection principle (36), and it tends to 1 as $|s| \to \infty$. Besides, it has neither roots nor poles in the cut physical sheet, although it exhibits two branch cuts with the parametrized representation

$$\mathcal{F}^{\pm} = \{\mp\delta \pm (\delta + \imath)t, \quad t \in [0,1]\} \subset \mathcal{K}^{\pm}. \tag{45}$$

Consequently, it admits the product decomposition $F(s) = F^{+}(s)F^{-}(s)$, where the functions $F^{\pm}(s)$ are analytic in the domains $\mathcal{D}^{\pm}$, respectively. Since $F(s)$ is even, we can assume, without loss of generality,

$$F^{\pm}(-s) = F^{\mp}(s). \tag{46}$$

Details of the factorization may be found in AppendixA.

Once the factorization has been accomplished, Eq.(44) provides

$$K^{\pm}(s) = \sqrt{c}\frac{(s \mp a)(s \pm \imath b)}{\alpha^{\pm}(s)} \frac{s \pm s_3}{s \pm s_0} F^{\pm}(s), \tag{47}$$

so that $K^{\pm}(-s) = K^{\mp}(s)$ and we have the leading term asymptotics

$$K^{\pm}(s) = \sqrt{c}\exp(\pm\imath\pi/4)s^{3/2}, \quad \text{as} \quad |s| \to \infty,$$

in the relevant analyticity region. Here, the functions $\alpha(s)$ and $\beta(s)$ are factorized into the product of two functions, named plus and minus, respectively analytic in $\mathcal{D}^+$ and $\mathcal{D}^-$, namely

$$\alpha^{\pm}(s) = e^{\mp\imath\pi/4}\sqrt{s \mp \delta}, \quad \beta^{\pm}(s) = e^{\mp\imath\pi/4}\sqrt{s \pm \imath}.$$

The factor $e^{\mp\imath\pi/4}$ warrants that we have $\alpha^{\pm}(-s) = \alpha^{\mp}(s)$ and $\beta^{\pm}(-s) = \beta^{\mp}(s)$.

The W-H equation (38) becomes

$$\frac{p_3^+(s,0)}{GK^+(s)} = -\frac{1}{2\lambda^3}K^-(s)\bar{w}^-(s,0) + \imath\frac{\tau_0}{(s+k)K^+(s)}. \tag{48}$$

Therefore, in light of (39), both the l.h.s. and the first term at the r.h.s. in Eq.(48) behave as $O(s^{-1})$ as $|s| \to \infty$, whereas the last term at the r.h.s. behave as $O(s^{-5/2})$. This last term may be easily split into the sum of a plus and a minus function (indeed $-k$ is not a zero for $K^+(s)$)

$$\frac{p_3^+(s,0)}{GK^+(s)} - \imath\frac{\tau_0}{s+k}\left[\frac{1}{K^+(s)} - \frac{1}{K^+(-k)}\right] = -\frac{1}{2\lambda^3}K^-(s)\bar{w}^-(s,0) + \imath\frac{\tau_0}{(s+k)K^+(-k)},$$

so thus the l.h.s. is a plus function while the r.h.s is a minus function. Therefore, either hand is an entire function in the relevant domain and, in consideration of the common strip of analyticity existing between the two (which is really the line $\mathscr{L}$), analytic continuation warrants they are the *same* entire function $E(s)$. Determination of $E(s)$ hinges on the extended form of Liouville's theorem and on the asymptotic behaviour expected at infinity, see Sec.4.1. Consequently, $E(s) \equiv 0$ and

$$\bar{w}^-(s,0) = 2\imath\frac{\lambda^3}{K^-(k)}\frac{\tau_0}{(s+k)K^-(s)}, \tag{49}$$

whose single real pole, in consideration of the definition (47), matches the form (40) and thereby satisfies Sommerfeld's radiation condition.

For the plus transform of the reduced traction we have

$$\bar{p}_3^+(s,0) = \imath G \frac{\tau_0}{s+k}\left[1 - \frac{K^+(s)}{K^-(k)}\right],$$

and the corresponding full-range Fourier transform, evaluated on the crack line, easily follows from Eq.(30)

$$\bar{p}_3(s,0) = -\imath G \frac{\tau_0}{s+k}\frac{K^+(s)}{K^-(k)}. \tag{50}$$

6. Results

6.1. Representation of displacement

The inverse Fourier transform of Eq.(49) gives the displacement along the crack line

$$w(\xi_1,0,\tau) = \imath\lambda^3\tau_0 \frac{\exp \imath\Omega\tau}{\pi K^-(k)}\int_{\mathscr{L}} \frac{\exp(-\imath s\xi_1)}{(s+k)K^-(s)}\mathrm{d}s.$$

Ahead of the crack tip, displacement can be conveniently determined closing the integration path $\mathscr{L}$ around the top branch cut, $\mathcal{K}^+$, and adding the contribution of the poles $s = -k, -a$ and $s = \imath b$, namely

$$w(\xi_1,0,\tau) = -2\lambda^3\tau_0 \frac{\exp \imath\Omega\tau}{K^-(k)}\left[\frac{1}{2\pi\imath}\int_{\mathcal{K}^+}\frac{\exp(-\imath s\xi_1)}{(s+k)K^-(s)}\mathrm{d}s + \frac{\exp(\imath k\xi_1)}{K^+(k)}\right.$$
$$\left. - \frac{\exp(\imath a\xi_1)}{k-a}\frac{\alpha^+(a)}{\sqrt{c}(a+\imath b)F^+(a)}\frac{a+s_0}{a+s_3} + \frac{\exp(b\xi_1)}{k+\imath b}\frac{\alpha^-(\imath b)}{\sqrt{c}(a+\imath b)F^-(\imath b)}\frac{\imath b - s_0}{\imath b - s_3}\right],$$
$$\xi_1 < 0.$$

We remark that simple poles represent travelling waves. Indeed, the second term in square brackets provides the displacement wave entrained by the traction wave applied at the crack faces, Fig.7a, while the third term brings *outgoing* Rayleigh waves, reflected by the crack-tip. The last term is remarkable in that it represents waves that decay exponentially for $\xi_1 < 0$ and yet propagate along the ξ_2 direction, Fig.7c. To see this, we note that $\alpha(\imath b) = -\imath\sqrt{b^2+\delta^2}$ and $\beta(\imath b) = -\imath\sqrt{b^2-1}$, whence a pair of waves arises with speed

$$\frac{c_{b1}}{c_s} = \frac{\Omega}{\sqrt{b^2+\delta^2}}\lambda, \quad \text{and} \quad \frac{c_{b2}}{c_s} = \frac{\Omega}{\sqrt{b^2-1}}\lambda.$$

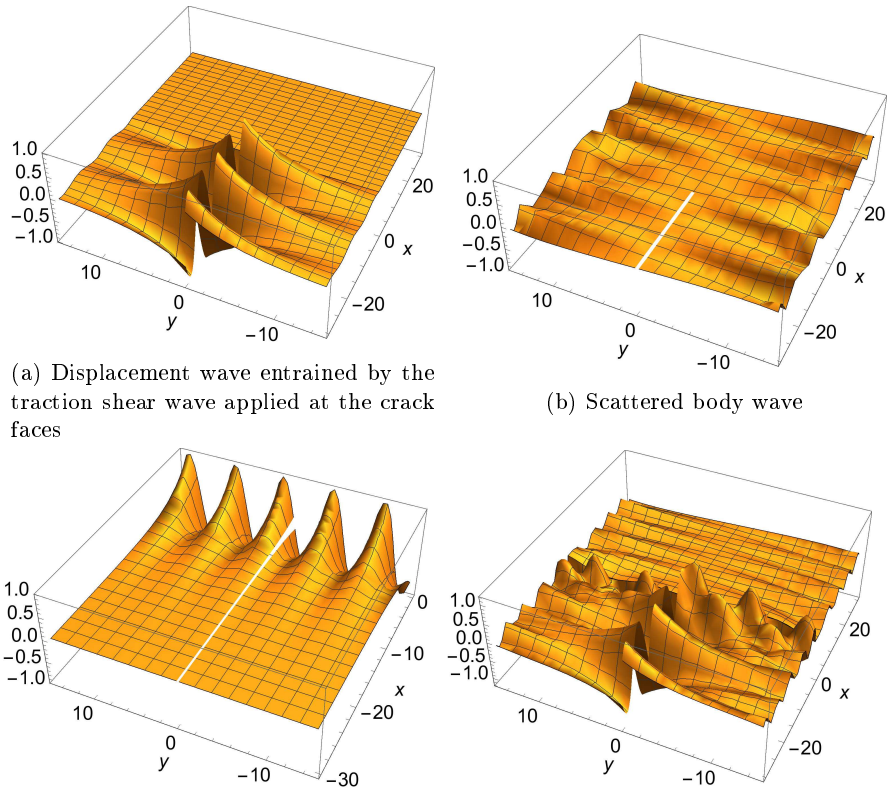

(a) Displacement wave entrained by the traction shear wave applied at the crack faces

(b) Scattered body wave

(c) Localized wave travelling along ξ_2

(d) Total wave pattern

Figure 7: Schematic representation of the wave pattern for $k < -a$ (each wave is scaled as to improve clarity and only one wave is considered for each contribution; reflected Rayleigh waves are disregarded)

Such waves may be put to great advantage in non-destructive material testing for they are highly localized along ξ_1 in correspondence of the crack-tip location. Furthermore, we observe that unlike $c_{b1} < c_R \leq c_s$, c_{b2} may be very large and greater than the Rayleigh wave speed. The possibility of surface waves moving at super-Rayleigh speed in couple-stress materials has been pointed out in Graff and Pao (1967) and discussed in Ottosen et al. (2000); Georgiadis and Velgaki (2003), in the context of plane strain. Interestingly, we note that for $\eta = 0$, $s = -a$ and $s = \imath b$ are no longer poles. The first term in square brackets represents non-planar body waves, moving with speed $\tilde{c}$ along the crack line and away from the crack-tip, Fig.7b.

It's interesting to observe that unboundedness (resonance) occurs only for $k = -a$, that is when the reduced traction shear wave is associated with Rayleigh edge-waves being fed *into* the crack-tip. Indeed, when $k = a$ and Rayleigh waves move *out* of the crack-tip, the second and the third term in square brackets combine into a bounded term.

We now consider the pole $s = -k$ in the context of the full-field solution (43). Eq.(28) shows that the real interval $|k| < \delta$ is associated with a decaying and a propagating wave along ξ_2, the latter with speed $c \geq c_R$ greater than Rayleigh. Indeed, this result corresponds to a super-Rayleigh loading condition. The condition of exponential loading, $k = \imath k_2, -1 < k_2 < 0$, still brings a pair of waves along ξ_2, one decaying and the other propagating, yet the latter moves with sub-Rayleigh speed $\Omega\lambda c_s(k_2^2 + \delta^2)^{-1/2}$. However, when decay is strong enough along ξ_1, i.e. $k_2 < -1$, the decaying wave turns propagating along ξ_2 with speed $\Omega\lambda c_s/\sqrt{k_2^2 - 1}$, which generally exceeds c_R.

By Jordan's lemma (Roos, 1969, §1.5), the displacement $w(\xi_1, 0)$ vanishes beyond the crack tip, in agreement with the boundary condition (18a). The full displacement field beyond the crack-tip is obtained from Eq.(43) and closing the integration path around $\mathcal{K}^-$. Then, only body waves moving with speed $\tilde{c}$ along the crack line and away from the crack-tip appear. It is concluded that the crack tip acts as a scatterer of the applied traction shear wave, Fig.7d.

Fig.8 shows the displacement along the crack line for two different values of

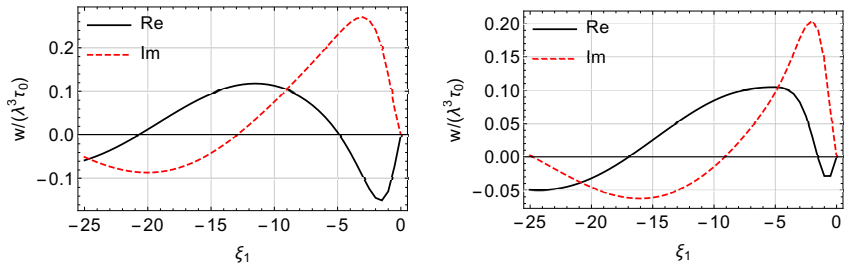

(a) $k = \frac{1}{2} - \imath$ (b) $k = 1 - \imath$

Figure 8: Dimensionless displacement $w/(\lambda^3\tau_0)$ ahead of the crack tip for $\delta = 0.2$ and $\eta = 0.797$

the traction shear wave wavenumber k.

6.2. Representation of stresses

The full-range Fourier transform of the symmetric and of the skew-symmetric shear stress along the crack line read

$$\bar{\sigma}_{23}(s,0) = -\frac{G}{\lambda(1+\delta^2)}\left\{[(1+\eta)s^2+1]\alpha(s) - [(1+\eta)s^2-\delta^2]\beta(s)\right\}\bar{w}^-(s,0), \tag{51}$$

and

$$\bar{t}_{23}(s,0) = -\frac{G}{2\lambda^3(1+\delta^2)}\left\{[(1+\eta)s^2+1]\alpha(s) + \delta^2[(1+\eta)s^2-\delta^2]\beta(s)\right\}\bar{w}^-(s,0). \tag{52}$$

The Fourier transform of the skew-symmetric shear stress, $\bar{\tau}_{23}(\xi_1,0)$, is then obtained subtracting Eq.(51) from (52). The Fourier transform of the couple stress is given by

$$\bar{\mu}_{22}(s,0) = \imath\lambda^{-1}\ell(1+\eta)s\,\bar{\sigma}_{23}(s,0). \tag{53}$$

It is important to observe that $\bar{\sigma}_{23}(s,0)$, $\bar{t}_{23}(s,0)$ and $\bar{\mu}_{22}(s,0)$ are not plus functions, although they are analytic in the half-plane $\Im(s) > b$. This analyticity property warrants that the Tauberian theorems may be applied in the asymptotic analysis of Sec.6.3. In fact, stresses feature in $\mathcal{D}^+$ the branch cut $\mathcal{F}^+$, coming from $F^-(s)$, alongside the simple poles $s = -a$, $\imath b$ and $s = -k$, originating from $\bar{w}^-(s,0)$. Such poles provide travelling wave contributions to the stress field ahead of the crack tip, as described for displacement.

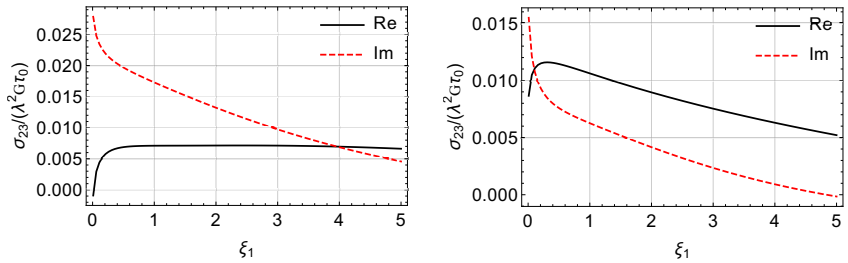

(a) $k = \frac{1}{2} - \imath$ (b) $k = 1 - \imath$

Figure 9: Dimensionless symmetric shear stress $\sigma_{23}/(\lambda^2 G\tau_0)$, beyond the crack-tip, for $\delta = 0.2$ and $\eta = -0.7$

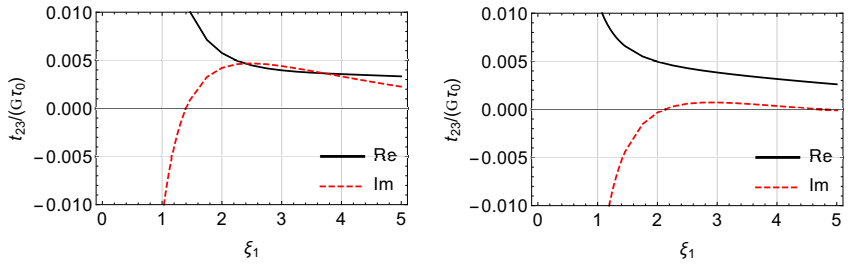

(a) $k = \frac{1}{2} - \imath$ (b) $k = 1 - \imath$

Figure 10: Dimensionless total shear stress $t_{23}/(G\tau_0)$, beyond the crack-tip, for $\delta = 0.2$, $\eta = 0.797$

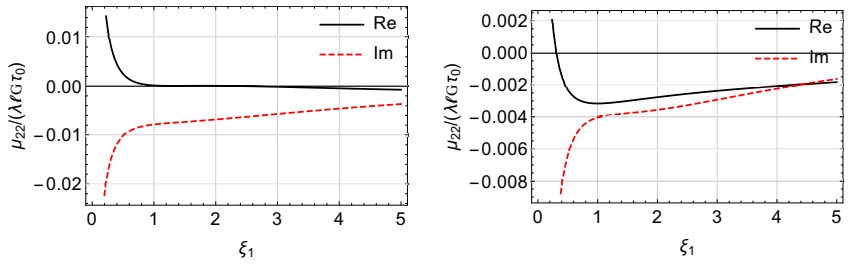

(a) $k = \frac{1}{2} - \imath$ (b) $k = 1 - \imath$

Figure 11: Dimensionless couple stress $\mu_{22}/(\lambda\ell G\tau_0)$, beyond the crack-tip, for $\delta = 0.2$ and $\eta = 0.797$

Beyond the crack tip, integration in the inverse Fourier transform for stresses is conveniently carried out closing the integration path $\mathscr{L}$ around the lower branch cut $\mathcal{K}^-$. In particular, such deformation of the integration path is necessary to perform the inverse Fourier transform of Eq.(52), in consideration of the divergent asymptotic behaviour of $\bar{t}_{23}$ as $|s| \to +\infty$, see Eq.(55). Like for displacement, there are no travelling waves contributing to stress beyond the crack-tip. Indeed, we have the representation formulas for body stress waves

$$\sigma_{23}(\xi_1,0,\tau) = 2\lambda^2 G\tau_0 \frac{\sqrt{1-\imath\delta}}{\pi(\delta-\imath)K^-(k)}\left[I_0^{(1)}(\xi_1) - I_1^{(1)}(\xi_1)\right]\exp\left[\imath\left(-\delta\xi_1+\Omega\tau\right)\right], \tag{54a}$$

$$t_{23}(\xi_1,0,\tau) = G\tau_0 \frac{\sqrt{1-\imath\delta}}{\pi(\delta-\imath)K^-(k)}\left[I_0^{(1)}(\xi_1) + \delta^2 I_1^{(1)}(\xi_1)\right]\exp\left[\imath\left(-\delta\xi_1+\Omega\tau\right)\right], \tag{54b}$$

where $n \in \{1,2\}$,

$$I_{0,1}^{(n)}(\xi_1) = \int_{0,1}^{\infty} f_{0,1}^{(n)}(t)\exp[(\imath\delta-1)t\xi_1]\mathrm{d}t,$$

and

$$f_0^{(n)}(t) = \frac{[(1+\eta)s(t)^2+1]^n\alpha^-(s(t))}{[s(t)+k]K^-(s(t))}\sqrt{t}, \qquad t>0,$$
$$f_1^{(n)}(t) = \frac{[(1+\eta)s(t)^2-\delta^2]^n\beta^-(s(t))}{[s(t)+k]K^-(s(t))}\sqrt{t-1}, \qquad t>1.$$

The behaviour of the symmetric and of the total stress is shown in Figs.9 and 10, while couple stress is plotted in Fig.11.

From Eq.(50), we write the inversion formula for the reduced total traction

$$p_3(\xi_1,0,\tau) = -\imath G\tau_0 \frac{\exp\imath\Omega\tau}{2\pi}\int_{\mathscr{L}} \frac{\exp(-\imath s\xi_1)}{s+k}\frac{K^+(s)}{K^-(k)}\mathrm{d}s,$$

that, ahead of the crack-tip, reduces to the contribution of the pole $s=-k$ reproducing the applied shear wave. Beyond the crack-tip, we write $K^+(s) = K(s)/K^-(s)$ and

$$\bar{p}_3(s,0) = -G\frac{K(s)}{2\lambda^3}\bar{w}^-(s,0).$$

Upon deforming the integration path around $\mathcal{K}^-$, we get the representation formula for reduced traction body waves

$$p_3(\xi_1,0,\tau)=G\tau_0\frac{\exp\left[\imath\left(-\delta\xi_1+\Omega\tau\right)\right]}{2\pi(1+\imath\delta)K^-(k)}\left[I_0^{(2)}(\xi_1)-I_1^{(2)}(\xi_1)\right].$$

6.3. Dynamic stress intensity factors

Eq.(49) immediately provides us with the asymptotics

$$\bar{w}^-(s,0)=2\imath^{3/2}\lambda^3\tau_0\frac{1}{\sqrt{c}K^-(k)}s^{-5/2},\quad \text{as}\quad |s|\to\infty,$$

valid in the analyticity region $\mathcal{D}^-$ (we neglect the harmonic term throughout this Section). Then, the Tauberian theorem (Roos, 1969, §2.14) lends the following asymptotic representation for the inverse Fourier transform

$$\ell w(x_1,0)=\text{r.b.m.}+K^w_{\text{III}}(-x_1)^{3/2},\quad \text{as}\quad x_1\to 0^-$$

where r.b.m. is an inessential rigid body motion and

$$K^w_{\text{III}}=-16\lambda^{3/2}\tau_0\frac{1}{3\sqrt{2\pi\ell(1+\eta)(3-\eta)}K^-(k)}.$$

Asymptotics for the symmetric, total and couple stress, respectively Eqs.(51,52) and (53), are similarly obtained

$$\begin{aligned}
&\bar{\sigma}_{23}(s,0)=-\imath^{3/2}\lambda^2G\tau_0\tfrac{1-\eta}{\sqrt{c}K^-(k)}s^{-3/2},\\
&\bar{t}_{23}(s,0)=-\imath^{3/2}G\tau_0\tfrac{1+\eta}{\sqrt{c}K^-(k)}\sqrt{s},\qquad \text{as } |s|\to\infty.\\
&\bar{\mu}_{22}(s,0)=\imath^{1/2}\lambda\ell G\tau_0\tfrac{1-\eta^2}{\sqrt{c}K^-(k)}s^{-1/2},
\end{aligned}\tag{55}$$

Then, for the respective inverse Fourier transforms, we infer the asymptotic behaviour

$$\begin{aligned}
&\sigma_{23}(x_1,0)=\Sigma_{23}+K^\sigma_{\text{III}}\sqrt{x_1},\\
&t_{23}(x_1,0)=K^t_{\text{III}}\,x_1^{-3/2},\qquad \text{as } x_1\to 0^+,\\
&\mu_{22}(x_1,0)=K^\mu_{\text{III}}\,x_1^{-1/2},
\end{aligned}$$

where Σ_{23} can be determined evaluating Eq.(54a) at $\xi_1 = 0$. Here, we have let the dynamic stress intensity factors for stresses

$$K^{\sigma}_{\mathrm{III}} = -4\lambda^{3/2} G\tau_0 \frac{1-\eta}{\sqrt{2\pi\ell(3-\eta)(1+\eta)}K^{-}(k)},$$
$$K^{t}_{\mathrm{III}} = -(\lambda\ell)^{3/2} G\tau_0 \sqrt{\frac{1+\eta}{2\pi(3-\eta)}} \frac{1}{K^{-}(k)},$$
$$K^{\mu}_{\mathrm{III}} = -2(1-\eta)K^{t}_{\mathrm{III}}.$$

Such expressions generalize to the dynamic regime the asymptotic results (Radi, 2008, Eqs.(38)) obtained for static application of the far-field loading K_{III}, valid in linear elastic fracture mechanics (LEFM). Indeed, the correction accounts for the important role of frequency of the applied loading on stress concentration (Graff and Pao, 1967). Formal correspondence with LEFM results is met by taking

$$K_{\mathrm{III}} = 2G\tau_0\sqrt{\lambda^3\ell}\frac{1}{K^{-}(k)}.$$

This expression may be explained looking at the far-field behaviour of $w(r, \vartheta = 0)$, $r \to +\infty$, which is obtained by investigating the behaviour of $\bar{w}(s, 0)$ as $s \to 0$. In the general case, $\bar{w}^{-}(s, 0)$ behaves like a constant as $s \to 0$ and thereby $w(r)$ decays as r^2. In the static limit we have $\delta = 0$, $\lambda = 2^{-1/2}$ and, for $k \ll s$, we get $K^{-}(s) \sim \sqrt{K(s)} \sim -\sqrt{\imath s}$ and

$$\bar{w}^{-}(s, 0) = 2\imath^{3/2}\frac{\lambda^3}{\sqrt{k}}\frac{\tau_0}{s^{3/2}},$$

whence, by the Tauberian theorem,

$$\ell w(x_1, 0) = \frac{2K_{\mathrm{III}}}{G}\sqrt{\frac{x_1}{2\pi}},$$

which is the far-field behaviour of LEFM (Zhang et al., 1998).

7. Conclusions

Diffraction of reduced traction shear waves applied at the faces of a semi-infinite rectilinear crack in an elastic half-space with microstructure is considered. Microstructure is accounted for through the indeterminate theory of

couple stress elasticity and motion is restricted to antiplane deformation. The full-field solution is obtained in closed form through the Wiener-Hopf technique and it may be adopted as a building block for the solution of general wave scattering problems in a cracked couple-stress half-space. A rather involved wave pattern appears, especially when compared to the simple scenario of classical elasticity. Indeed we find

1. entrained waves moving along the crack line with the applied loading speed, which may be either decaying away from the crack, in the sub-critical regime, or propagating, in the super-critical regime. Transition from a sub-critical to a super-critical regime occurs at the Rayleigh speed, which is wavenumber dependent (dispersion);
2. a pair of Rayleigh waves confined to the crack faces and reflected from the crack-tip;
3. a pair of waves highly localized near the crack-tip and moving away from it, which may be either decaying and propagating with sub-Rayleigh speed or propagating at sub-Rayleigh and super-Rayleigh speed, respectively;
4. body waves scattered by the crack-tip.

Special situations are connected to

- a loading moving *toward* the crack-tip at Rayleigh speed, because resonance occurs, i.e. solution is unbounded;
- an exponentially-decaying loading with harmonic time variation, for the associated phase speed is infinite;
- $\eta = 0$, because waves 2 and 3 disappear;
- $h_0 = h_{0cr} = 2^{-1/2}$ and $\eta = 0$, for then Rayleigh waves become non-dispersive and collapse into classical shear waves;
- the static regime $\Omega = 0$, for which Rayleigh waves collapse into classical shear waves.

Finally, dynamic stress intensity factors are determined for the symmetric stress, the couple-stress, the total stress and the reduced traction. They generalize to the dynamic regime the corresponding expression already obtained for the static application of the classical elastic Mode III solution in the far-field. The correction term brings out the important role of the loading frequency on the stress intensity factors.

8. Acknowledgements

The authors wish to thank Prof. G. Mishuris for his valuable comments. AV acknowledges the ERC Grant "Instabilities" for supporting his short stay in Trento University working on this paper. AN gratefully acknowledges support from National Group of Mathematical Physics (GNFM-INdAM) through the Young researchers fellowship programme 2017, Prot. n. U UFMBAZ-2017/0000259 08/06/2017.

9. Declaration of interest

Authors have no competing interest to declare.

AppendixA. Factorization of $F(s)$

In the logarithmic factorization, Cauchy theorem is exploited to split $\ln F(s)$ into the sum of two functions analytic in the regions $\mathcal{D}^{\pm}$, respectively,

$$\ln F^{\pm}(s) = \frac{1}{2\pi\imath}\int_{\mathscr{L}} \frac{\ln F(\zeta)}{\zeta - s}\mathrm{d}\zeta.$$

Due to the analytical property of $F(s)$ and Jordan's lemma, the integration path $\mathscr{L}$ can be closed around the upper branch cut $\mathcal{F}^{+}$. The contributions from the branch points is vanishingly small. The upper branch cut is parametrized as in Eq.(45). In the special case $\delta = 0$, the branch cut corresponds to the interval on the imaginary axis $\{\imath t,\, t \in [0,1]\}$.

The ratio $\alpha(s)/\beta(s)$ appearing in the function $F(s)$ jumps across the branch cut according to

$$\lim_{\epsilon\to 0^+}\frac{\alpha(\zeta(t)\pm\imath\epsilon)}{\beta(\zeta(t)\pm\imath\epsilon)}=\pm\imath\sqrt{\frac{t}{1-t}\frac{(2-t)\delta-\imath t}{(1-t)\delta-\imath(1+t)}},\quad t\in[0,1].$$

Eq.(45) yields

$$\ln F^-(s)=\frac{\delta+\imath}{2\pi\imath}\int_0^1\lim_{\epsilon\to 0}\left[\ln F(\zeta(t)-\imath\epsilon)-\ln F(\zeta(t)+\imath\epsilon)\right]\frac{\mathrm{d}t}{\zeta(t)-s},$$

and using

$$\begin{aligned}\ln F\left(\zeta(t)-\imath\epsilon\right)-\ln F\left(\zeta(t)+\imath\epsilon\right)&=\ln\frac{F(\zeta(t)-\imath\epsilon)}{F(\zeta(t)+\imath\epsilon)}\to\\&=\ln\frac{1-\imath\psi(t)}{1+\imath\psi(t)}=-2\imath\arctan\psi(t)=-2\imath\left(\pi/2-\arctan\psi^{-1}(t)\right),\end{aligned}\quad(A.1)$$

with

$$\psi(t)=\left(\frac{(1+\eta)[(\delta+\imath)t-\delta]^2-\delta^2}{(1+\eta)[(\delta+\imath)t-\delta]^2+1}\right)^2\sqrt{\frac{(1-t)^2\delta-\imath(1-t^2)}{(2-t)\delta t-\imath t^2}},\qquad(A.2)$$

we obtain

$$\ln F^-(s)=\frac{\delta+\imath}{\pi}\int_0^1\frac{\arctan\psi(t)}{\delta-(\delta+\imath)t+s}\mathrm{d}t=G^-(s).\qquad(A.3)$$

In the static case $\delta=0$, Eq.(A.2) gives the corresponding function introduced in (Radi, 2008, Eq.(59))

$$\psi(t)=\frac{t^3\sqrt{1-t^2}}{\left(t^2-\frac{1}{\eta+1}\right)^2}.$$

In this situation, a pole of $\psi(t)$ is encountered at $t=1/\sqrt{1+\eta}$, inasmuch as $\eta>0$, although this brings no harm to the evaluation of $G^-(s)$, in light of the arctangent being bounded. In contrast, special care must be paid in the evaluation of the contour integral when the root s_3 lays inside the branch cut, as this may bring a $2\pi\imath$ jump when transforming the difference of the logarithms in Eq.(A.1). Clearly, from Eq.(A.3) and the property (46), we have

$$F^{\mp}(s)=\exp G^{\mp}(s),$$

where $G^{\pm}(-s) = G^{\mp}(s)$. Observing that the factorization is independent of the location of s_0 and enforcing Eq.(44) to hold at $s = 0$ brings the requirement

$$s_0 = \imath abs_3 \sqrt{c \frac{F^+(0)F^-(0)}{\alpha(0)K(0)}}. \tag{A.4}$$

In particular, the point s_0 coincides with s_3 when the function $K(s)$ admits two pairs of roots in the physical sheet, while it is conveniently located in the branch cut when $K(s)$ admits three root pairs.

References

Achenbach, J., 2012. Wave propagation in elastic solids. Vol. 16. Elsevier.

Bleistein, N., Handelsman, R. A., 1975. Asymptotic expansions of integrals. Courier Corporation.

Clebsch, A., 1863. Ueber die Reflexion an einer Kugelfläche. Journal für die reine und angewandte Mathematik 61, 195–262.

Destrade, M., Fu, Y., Nobili, A., 2016. Edge wrinkling in elastically supported pre-stressed incompressible isotropic plates. Proc. R. Soc. A 472 (2193), 20160410.

Eremeyev, V. A., Rosi, G., Naili, S., 2016. Surface/interfacial anti-plane waves in solids with surface energy. Mechanics Research Communications 74, 8–13.

Eremeyev, V. A., Rosi, G., Naili, S., 2018. Comparison of anti-plane surface waves in strain-gradient materials and materials with surface stresses. Mathematics and Mechanics of Solids, 1081286518769960.

Eringen, A. C., 1999. Theory of micropolar elasticity. In: Microcontinuum field theories. Springer, pp. 101–248.

Freund, L. B., 1998. Dynamic fracture mechanics. Cambridge university press.

Gao, X.-L., Ma, H., 2010. Solution of eshelby's inclusion problem with a bounded domain and eshelby's tensor for a spherical inclusion in a finite

spherical matrix based on a simplified strain gradient elasticity theory. Journal of the Mechanics and Physics of Solids 58 (5), 779 – 797.
URL http://www.sciencedirect.com/science/article/pii/S0022509610000074

Georgiadis, H., 2003. The mode III crack problem in microstructured solids governed by dipolar gradient elasticity: static and dynamic analysis. Journal of Applied Mechanics 70 (4), 517–530.

Georgiadis, H., Vardoulakis, I., 1998. Anti-plane shear Lamb's problem treated by gradient elasticity with surface energy. Wave Motion 28 (4), 353–366.

Georgiadis, H., Velgaki, E., 2003. High-frequency Rayleigh waves in materials with micro-structure and couple-stress effects. International Journal of Solids and Structures 40 (10), 2501–2520.

Gourgiotis, P., Georgiadis, H., Neocleous, I., 2013. On the reflection of waves in half-spaces of microstructured materials governed by dipolar gradient elasticity. Wave Motion 50 (3), 437–455.

Graff, K., Pao, Y.-H., 1967. The effects of couple-stresses on the propagation and reflection of plane waves in an elastic half-space. Journal of Sound and Vibration 6 (2), 217–229.

Kaplunov, J., Nobili, A., 2017. A robust approach for analysing dispersion of elastic waves in an orthotropic cylindrical shell. Journal of Sound and Vibration 401, 23–35.

Koiter, W., 1964. Couple-stress in the theory of elasticity. In: Proc. K. Ned. Akad. Wet. Vol. 67. North Holland Pub, pp. 17–44.

Lakes, R., 1986. Experimental microelasticity of two porous solids. International Journal of Solids and Structures 22 (1), 55–63.

Lam, D. C., Yang, F., Chong, A., Wang, J., Tong, P., 2003. Experiments and theory in strain gradient elasticity. Journal of the Mechanics and Physics of Solids 51 (8), 1477–1508.

Maranganti, R., Sharma, P., 2007. A novel atomistic approach to determine strain-gradient elasticity constants: Tabulation and comparison for various metals, semiconductors, silica, polymers and the (ir) relevance for nanotechnologies. Journal of the Mechanics and Physics of Solids 55 (9), 1823–1852.

Mindlin, R., Eshel, N., 1968. On first strain-gradient theories in linear elasticity. International Journal of Solids and Structures 4 (1), 109–124.

Mindlin, R. D., 1964. Micro-structure in linear elasticity. Archive for Rational Mechanics and Analysis 16 (1), 51–78.

Mishuris, G., Piccolroaz, A., Radi, E., 2012. Steady-state propagation of a mode III crack in couple stress elastic materials. International Journal of Engineering Science 61, 112–128.

Morini, L., Piccolroaz, A., Mishuris, G., 2014. Remarks on the energy release rate for an antiplane moving crack in couple stress elasticity. International Journal of Solids and Structures 51 (18), 3087–3100.

Morini, L., Piccolroaz, A., Mishuris, G., Radi, E., 2013. On fracture criteria for dynamic crack propagation in elastic materials with couple stresses. International Journal of Engineering Science 71, 45–61.

Mow, C.-C., Pao, Y.-H., 1971. The diffraction of elastic waves and dynamic stress concentrations. Tech. rep., RAND CORP SANTA MONICA CALIF.

Nakamura, S., Lakes, R., 1995. Finite element analysis of Saint-Venant end effects in micropolar elastic solids. Engineering Computations 12 (6), 571–587.

Nobili, A., Radi, E., Lanzoni, L., 2017. Flexural edge waves generated by steady-state propagation of a loaded rectilinear crack in an elastically supported thin plate. In: Proc. R. Soc. A. Vol. 473. The Royal Society, p. 20170265.

Noble, B., 1958. Methods based on the Wiener-Hopf technique for the solution of partial differential equations, International Series of Monographs on Pure and Applied Mathematics. Vol. 7. Pergamon Press, New York.

Ottosen, N. S., Ristinmaa, M., Ljung, C., 2000. Rayleigh waves obtained by the indeterminate couple-stress theory. European Journal of Mechanics-A/Solids 19 (6), 929–947.

Radi, E., 2008. On the effects of characteristic lengths in bending and torsion on mode iii crack in couple stress elasticity. International Journal of Solids and Structures 45 (10), 3033–3058.

Rayleigh, J., 1896. The theory of sound. Macmillan.

Roos, B. W., 1969. Analytic functions and distributions in physics and engineering.

Shodja, H., Goodarzi, A., Delfani, M., Haftbaradaran, H., 2015. Scattering of an anti-plane shear wave by an embedded cylindrical micro-/nano-fiber within couple stress theory with micro inertia. International Journal of Solids and Structures 58, 73–90.

Yang, F., Chong, A., Lam, D. C. C., Tong, P., 2002. Couple stress based strain gradient theory for elasticity. International Journal of Solids and Structures 39 (10), 2731–2743.

Zhang, L., Huang, Y., Chen, J., Hwang, K., 1998. The mode III full-field solution in elastic materials with strain gradient effects. International Journal of Fracture 92 (4), 325–348.